

ZP300A-B



STANDARD RECOVERY DIODE

Features

Low forward voltage drop
Soft recovery
Hermetic metal cases with ceramic insulators

Application

Inverters and choppers
AC. motor control
Snubber and free-wheeling diodes

$I_{F(AV)}$	300A
V_{RRM}	200-1000V
I_{FSM}	4.2KA
I^2t	90KA ² S

SYMBOL		PARAMETERS	TESTING CONDITION	$T_j(^{\circ}C)$	VALUES	UNIT
Current Tatings	$I_{F(AV)}$	average forward current	180° half sine wave 50Hz Double side cooled, $T_{hs}=126^{\circ}C$	150	Max.300	A
	$I_{F(AV)}$	average forward current	180° half sine wave 50Hz Double side cooled, $T_{hs}=55^{\circ}C$	150	Max.884	A
	I_{FSM}	Surge forward current	10ms half sine wave $V_R=0.6V_{RRM}$	150	Max.4.2	KA
	I^2t	I^2t for fusing coordination		150	Max.90	KA ² S
Characteristics	V_{RRM}	Repetitive peak reverse voltage	V_{RRM} tp=10ms $V_{RSM}=V_{RRM}+100V$	150	200-1000	V
	I_{RRM}	Repetitive peak current	$V_{RM}=V_{RRM}$	150	Max.30	Ma
	V_{FM}	Peak on-state voltage	$I_{TM}=900A$, $F=9.0KN$	25	Max.1.8	V
	V_{FO}	Threshold voltage		150	Max.0.98	V
	r_F	Forward slop resistance			Max.0.31	mΩ
	I_{rm}	Reverse recovery current	$I_{TM}=600A$, $t_p=1000\mu s$, $di/dt=-20A/\mu s$, $V_r=50V$	100	Max.75	A
	t_{rr}	Reverse recovery time			Max.4.0	μs
	Q_{rr}	Recovery charge			Max.159.7	μc
Thermal &Mechanical Date	$R_{th(j-h)}$	Thermal resistance Junction to heat sink	At 180° sine, double side cooled mounting force 9.0KN		Max.0.065	$^{\circ}C/W$
	F_m	Mounting force			5.3 -10	KN
	T_{stg}	Stored temperature			-40-160	$^{\circ}C$
	W_t	Weight			85	g

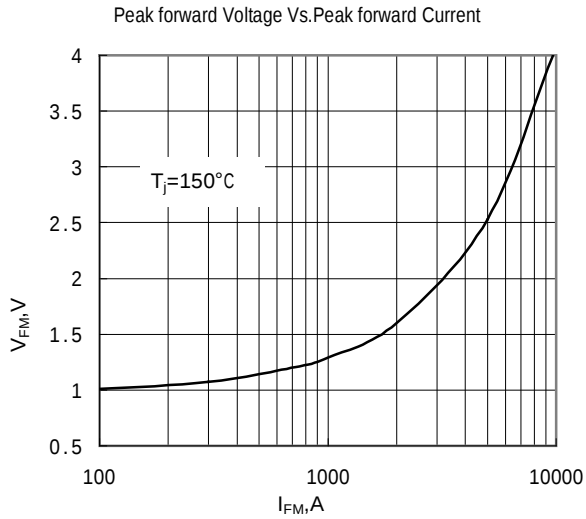


Fig.1

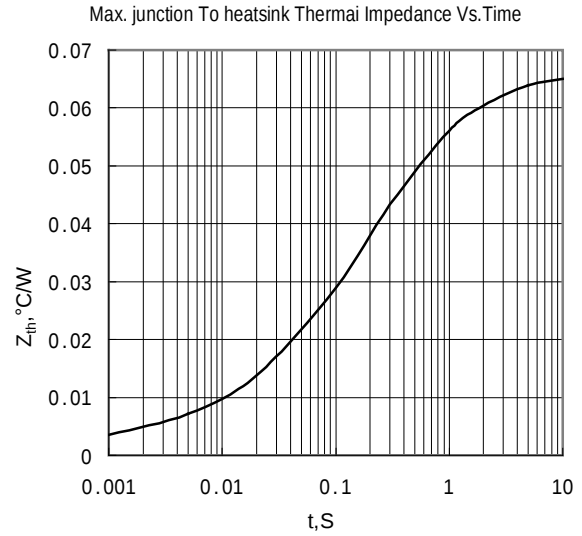


Fig.2

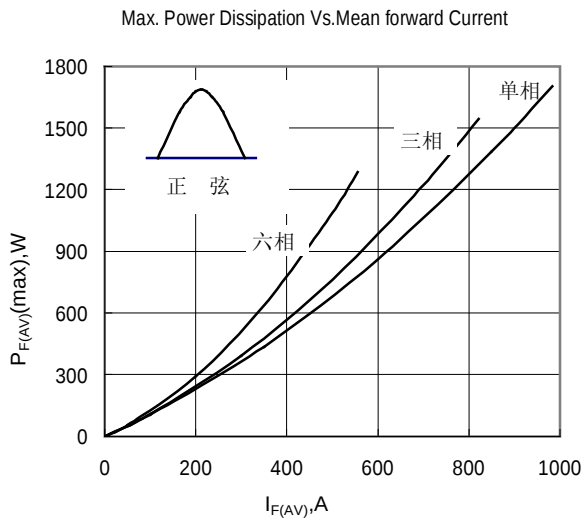


Fig.3

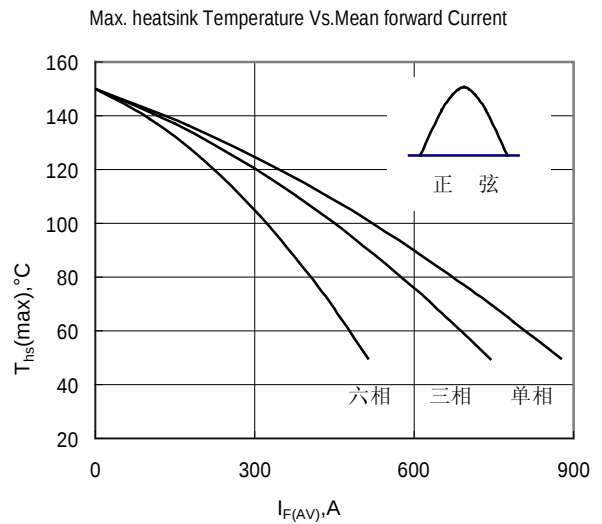


Fig.4

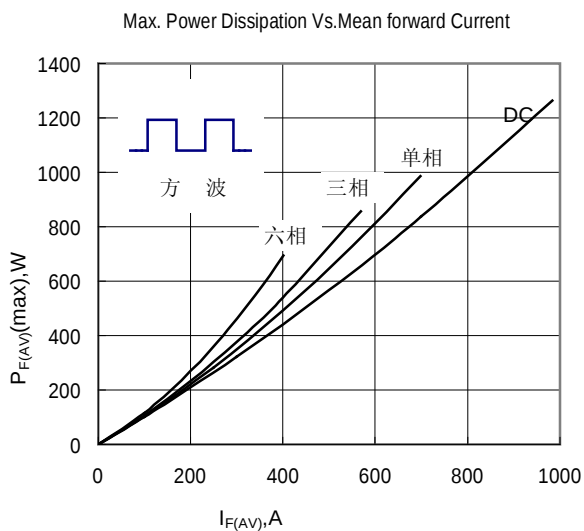


Fig.5

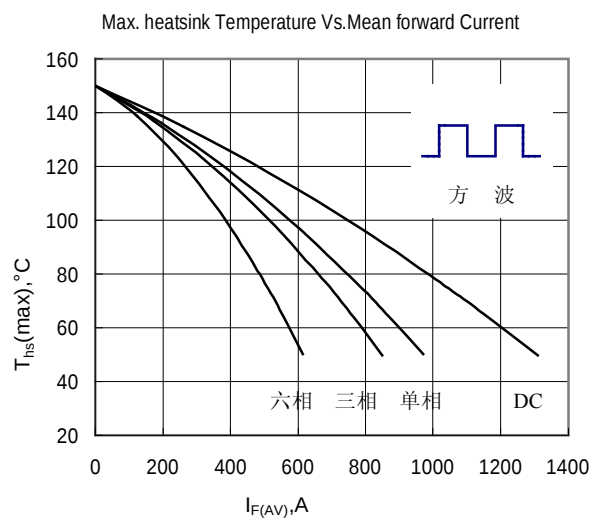


Fig.6

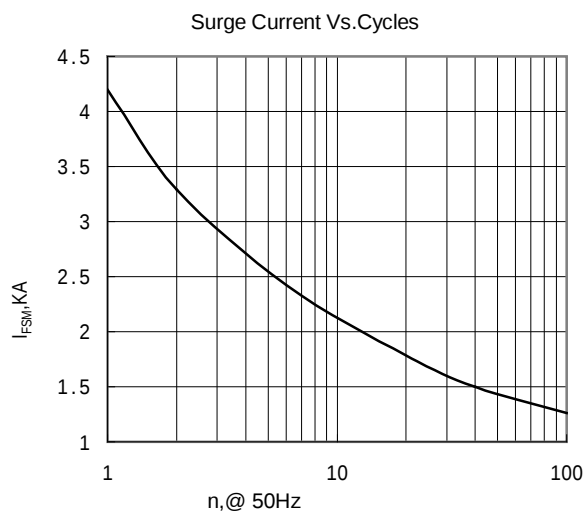


Fig.7


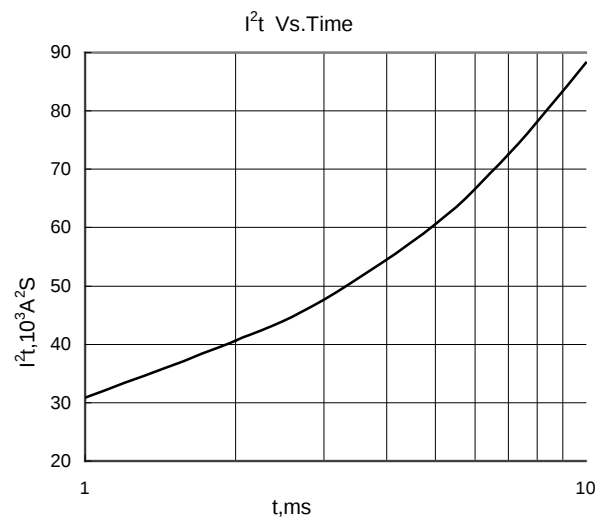



Fig.8

Dimensions:

C2

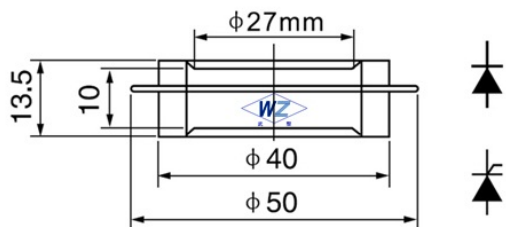

C8

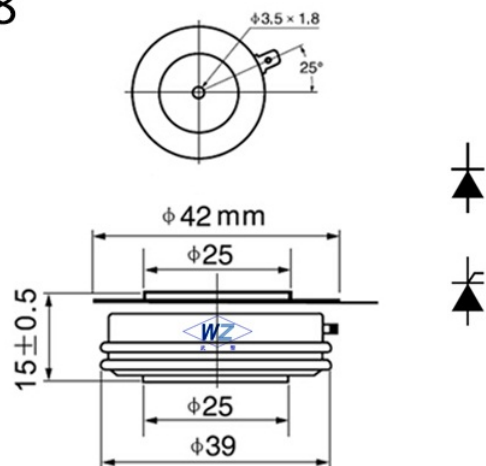

Wuhan Wuzheng Rectifier Co., Ltd

Add: NO. 73 Gaoxin Five Road, East Lake New Technology Development Zone, Wuhan City, Hubei province.

Tel : 86-27-87001995

Fax: 86-27-87180920

Email: info@techele.com

Web: www.techele.com/en

cn-techele.en.alibaba.com