

KP2500A-H

PHASE CONTROL THYRISTOR



Features

Center amplifying gate
Metal case with ceramic insulator
Low on-state and switching losses

Application

Large power converter
DC and AC switches
Active & Passive inverter

$I_{T(AV)}$	2500 A
V_{DRM}/V_{RRM}	1900~3000V
I_{TSM}	25KA
I^2T	8000 KA ² S


Symb.		parameter	Test Conditions	$T_{J(°C)}$	Value	Unit
Current Ratings	$I_{T(AV)}$	Average on-state current	180° half sine wave 50Hz Double side cooled $T_{hs}=70°C$	125	2500	A
	$I_{T(AV)}$	Average on-state current	180° half sine wave 50Hz Double side cooled $T_{hs}=55°C$	125	3211	A
	I_{TSM}	Surge on-state current	10ms half sine wave $VR=0.6V_{RRM}$	125	25	KA
	I^2t	I^2T for fusing coordination		125	8000	KA ² S
Characteristics	V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	V_{DRM} & V_{RRM} $t_p=10ms$ V_{DSM} & $V_{RSM}=V_{DRM}+V_{RRM}+100V$	125	1900-3000	V
	I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM}=V_{DRM}$ $V_{RM}=V_{RRM}$	125	Max.250	mA
	V_{TO}	Threshold voltage		125	Max.1.07	V
	V_{TM}	Threshold voltage	$I_{TM}=5000A$, $F=78KN$	25	Max.2.40	V
	r_T	On-state slop resistance		125	Max.0.19	mΩ
	I_H	Holding current	$V_A=12V$, $I_A=1A$	25	20-300	mA
Dynamic Parameters	dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125	Max.500	V/μs
	di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 600A, Gate pulse $t_r \leq 0.5\mu s$ $I_{GM}=1.5A$	125	Max.250	A/μs
	t_{rr}	Reverse recovery time	$I_{TM}=500A$, $t_p=1000\mu s$, $V_R=50V$ $di/dt=-20A/\mu s$	125	26	μs
	Q_{rr}	Reverse Recovery charge		125	3250	μc
Gate Parameters	I_{GT}	Gate trigger current	$V_A=12V$, $I_A=1A$	25	40-300	mA
	V_{GT}	Gate trigger voltage		25	0.8-3.0	V
	V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	Min.0.3	V

Thermal &Mechanical Date

Symb.	parameter	Test Conditions	$T_{J(^\circ)}$	Value	Unit
$R_{th(j-h)}$	Thermal resistance Junction to heat sink	At 180 ⁰ sine wave, double side cooled Clamping force 78KN		Max.0.016	$^\circ\text{C}/\text{W}$
F_m	Mounting force			70-85	KN
T_{stg}	Stored temperature			-40-140	$^\circ\text{C}$
W_t	Weight			1100	g

Dimensions:

C24

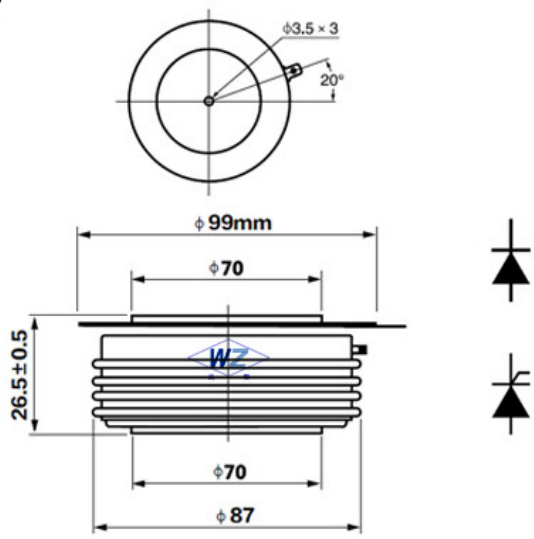

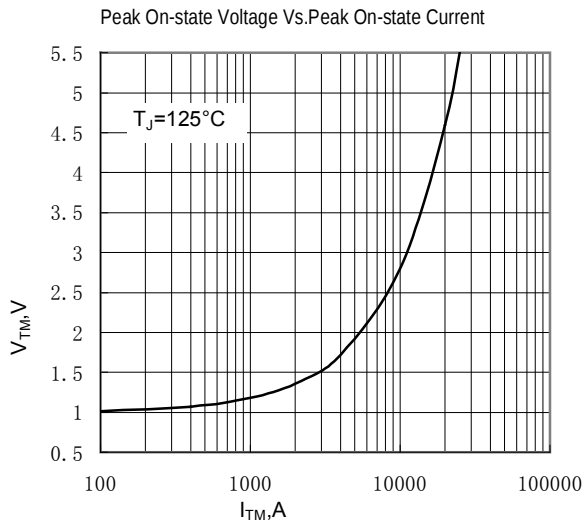


Fig.1

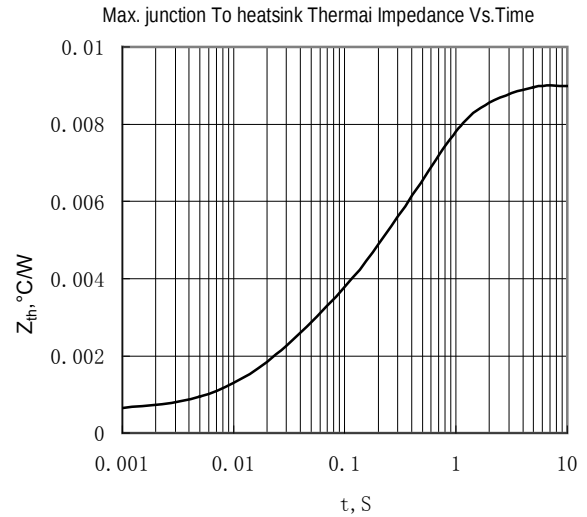


Fig.2

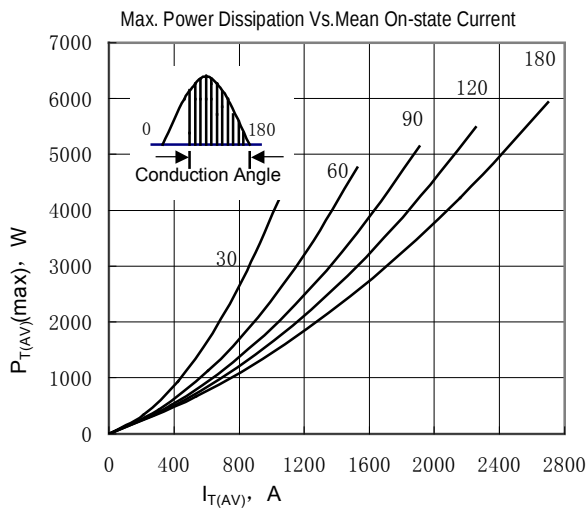


Fig.3

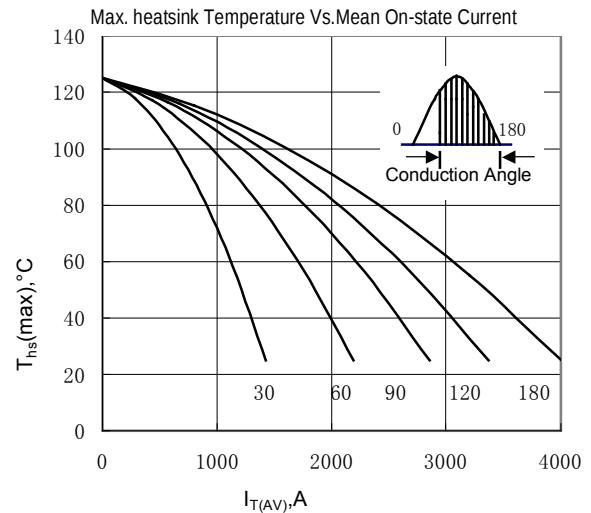


Fig.4

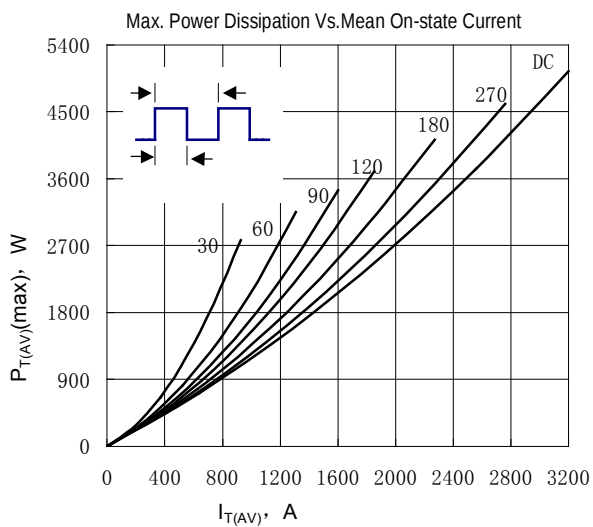


Fig.5

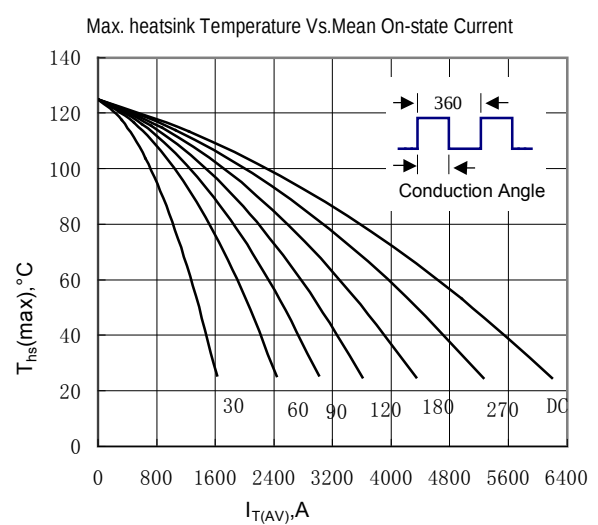


Fig.6

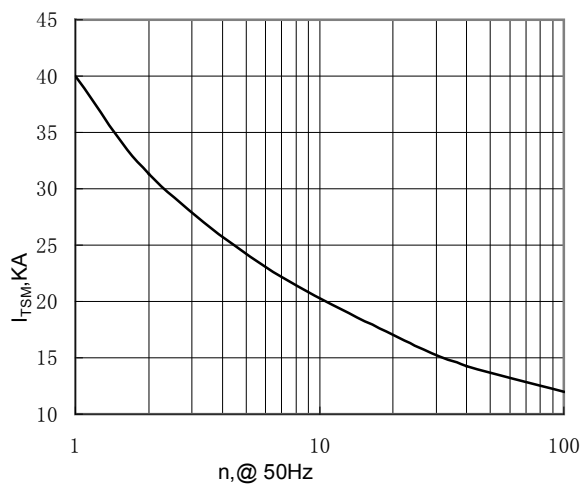


Fig.7

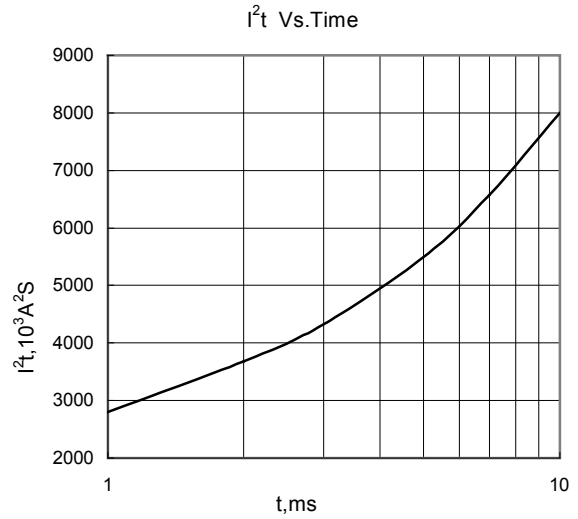


Fig.8

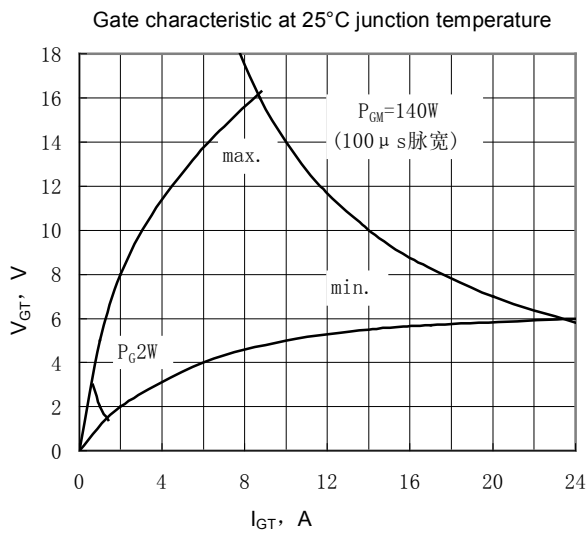


Fig.9

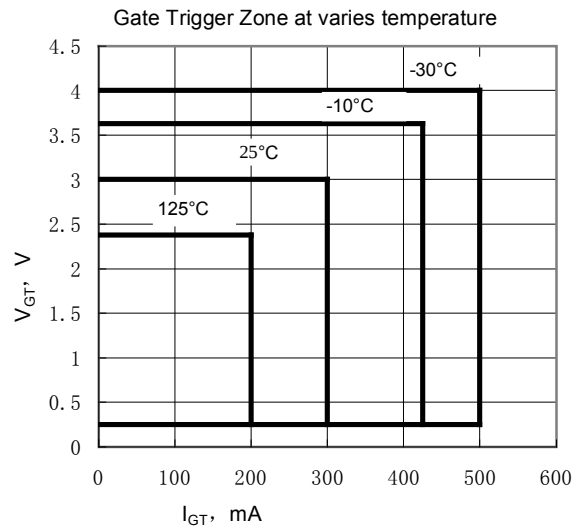


Fig.10

Wuhan Wuzheng Rectifier Co., Ltd

Add: NO. 73 Gaoxin Five Road, East Lake New Technology Development Zone, Wuhan City, Hubei province.

Tel : 86-27-87001995

Fax: 86-27-87180920

Email: info@techele.com

Web: www.techele.com/en

cn-techele.en.alibaba.com