

KK300A-E

FAST TURN-OFF THYRISTOR



Features

- Interdigitated amplifying gate
- Fast switch and high di/dt
- Low switching loss

Application

- Converter
- Chopper
- Induction heating

$I_{T(AV)}$	300 A
V_{DRM}/V_{RRM}	800~1600V
t_q	16~35 μ s
I_{TSM}	3.8 KA
I^2T	72KA ² S

Symb.		parameter	Test Conditions	$T_{J(c)}$)	Value	Unit
Current Ratings	$I_{T(AV)}$	average on-state current	180° half sine wave 50Hz Double side cooled $T_{hs}=72^{\circ}C$	115	300	A
	I_{TSM}	Surge on-state current	10ms half sine wave $V_R=0.6V_{RRM}$	115	38	KA
	I^2t	I^2t for fusing coordination		115	72	KA ² S
Characteristics	V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM}\&V_{RRM}$ tp=10ms $V_{DSM}\&V_{RSM}=V_{DRM}\&V_{RRM}+100V$	115	800-1600	V
	I_{DRM} I_{RRM}	Repetitive peak current	$V_{DM}=V_{DRM}$ $V_{RM}=V_{RRM}$	115	Max.30	mA
	V_{TO}	Threshold voltage		115	Max.1.60	V
	V_{TM}	Peak on-state voltage	$I_{TM}=900A, F=7.0KN$	25	Max.3.0	V
	r_T	On-state slop resistance		115	1.32	m Ω
	I_H	Holding current	$V_A=12V, I_A=1A$	25	20-400	ma
Dynamic Parameters	dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	115	Max.500	V/ μ s
	di/dt	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 800A, Gate pulse $t_r \leq 0.5\mu s, I_{GM}=1.5A$	115	Max.200	A/ μ s
	t_q	Circuit commutated turn-off time	$I_{TM}=600A, tp=1000\mu s, di/dt=-20A/\mu s, V_R=50V$	115	16-35	mA
	I_{rm}	Reserse recovery current	$T_M=600A, tp=1000\mu s, V_R=50V$ $dv/dt=30V/\mu s, di/dt=-20A/\mu s$	115	Max.49	A
	t_{rr}	Reverse recovery time		115	Max.3.4	μ s
	Q_{rr}	Recovery charge		115	Max.83	μ c
Gate Parameters	I_{GT}	Gate trigger current	$V_A=12V, I_A=1A$	25	40-250	mA
	V_{GT}	Gate trigger voltage		25	0.9-2.5	V
	V_{GD}	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	115	Min.0.3	V

Thermal & Mechanical Data

Symb.	parameter	Test Conditions	$T_J(^{\circ}\text{C})$	Value	Unit
$R_{th(j-h)}$	Thermal resistance Junction to heat sink	Double side cooled, clamping force 7.0N		0.055	$^{\circ}\text{C}/\text{W}$
F_m	Mounting force			5.3-10	KN
T_{stg}	Stored temperature			-40-+140	$^{\circ}\text{C}$
W_t	Weight			80	g

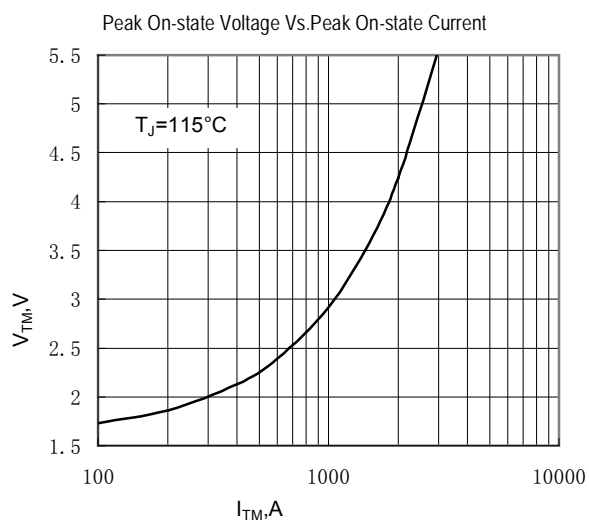


Fig.1

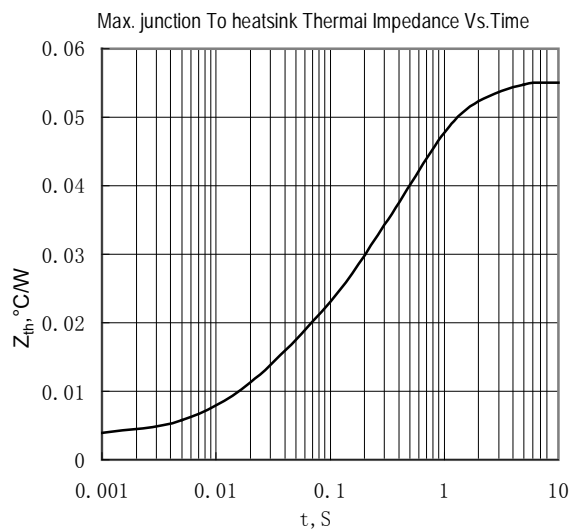


Fig.2

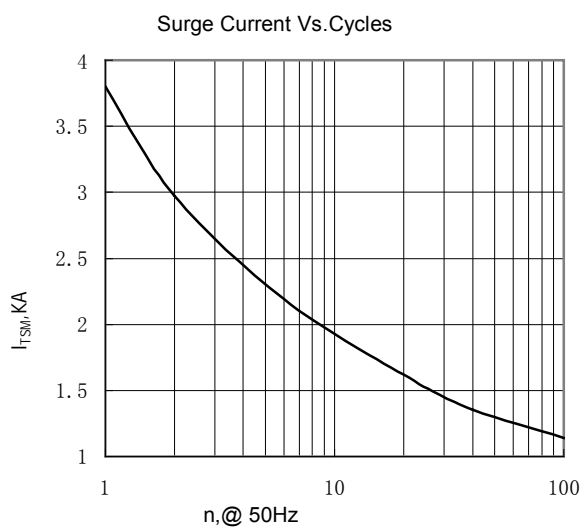


Fig. 3

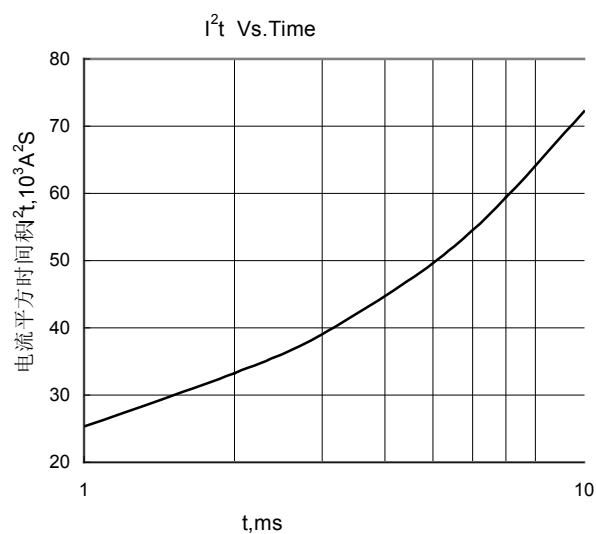


Fig.4

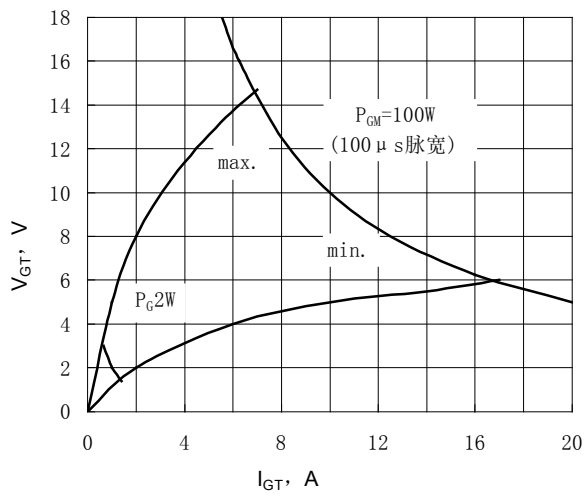


Fig.5


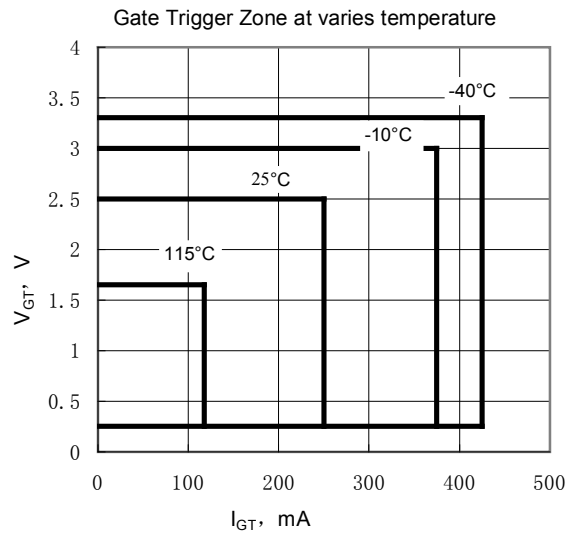



Fig.6

Dimensions:

C8

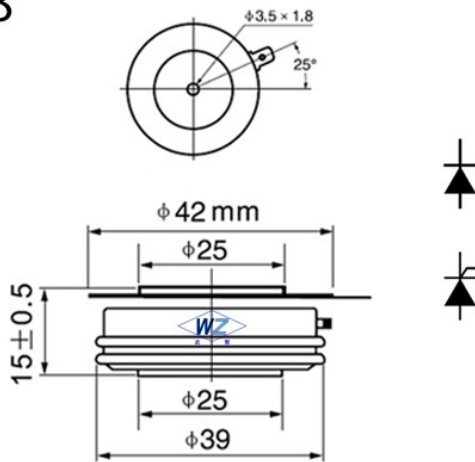

C3

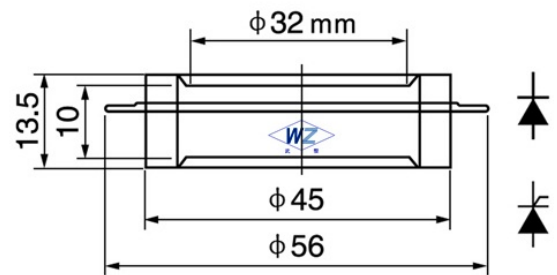

Wuhan Wuzheng Rectifier Co., Ltd

Add: NO. 73 Gaoxin Five Road, East Lake New Technology Development Zone, Wuhan City, Hubei province.

Tel : 86-27-87001995

Fax: 86-27-87180920

Email: info@techele.com

Web: www.techele.com/en

cn-techele.en.alibaba.com